

**NEW**  
**Mini Navigator Pro Valve Controller**

**STYLE 9327**


The Navigator Pro Mini is the perfect fit for those tight pump panels where space is at a premium. Measuring only 3.1" tall, it is a full inch shorter than the current Styles 9323 and 9325 Navigator Pro. The width, panel cutout and mounting holes are all identical to the Navigator Pro controllers.



**Features**

- Valve position is indicated with 5 ultra-bright LEDs so you can quickly see the position of the valve
- Compatible with the standard Navigator Pro electric actuator
- Includes valve open, valve close and one easy to program preset button that can be used to send the valve to a pre-programmed position when pressed
- Wiring, communication, networking and harnessing are all identical to the Styles 9323 and 9325 Navigator Pro controllers
- USB port on the back for quick and easy software updates if required
- Fully sealed, water tight enclosure
- Easy to program setup menu with the following programmable features:
  - Valve setup – pairing and calibration
  - LED brightness level – manual adjustment
  - Readout of firmware version
  - Return to factory default


**Specifications**

<b>Style</b>	9327
<b>Certification(s)</b>	
<b>Gewicht</b>	1 lb
<b>Typ</b>	Swing-Out Valve Controls
<b>Brand</b>	Navigator Pro
<b>Breite</b>	4"
<b>Höhe</b>	3.1"
<b>Tiefe</b>	1.5"
<b>Volts</b>	12 V DC or 24 V DC



# Mini Navigator Pro Valve Controller

STYLE 9327

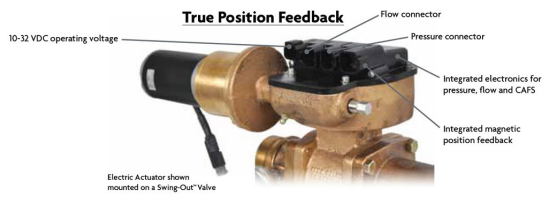

# Mini Navigator Pro Valve Controller

## STYLE 9327

### 9327 Electric Valve Controller Specifications

An Akron Brass Style 9327 Navigator Pro Mini Valve Controller shall be provided. The electric controls must be of true position feedback design, requiring no clutches in the motor or current limiting. The unit must be completely sealed with momentary open and close buttons. One additional button shall be available to be used for preset activation. The unit must be capable of being used in conjunction with at least two additional displays to control one valve. The unit must provide position indication through a series of 5 ultra-bright LEDs. It shall have manual adjustment of the brightness in the menus. The unit must carry a five year warranty.